


d	l ₊₁		d _k	k	d _m	No.	
5,0	6,0	1,0 – 3,0	9,5 -0,8	1,1 ±0,3	2,7	10.700.050.060	500
	8,0	2,5 – 5,0				10.700.050.080	500
	10,0	4,0 – 6,5				10.700.050.100	500
	12,0	6,0 – 8,0				10.700.050.120	500
	14,0	7,5 – 10,0				10.700.050.140	500
	16,0	8,0 – 12,0				10.700.050.160	500
	18,0	11,5 – 13,5				10.700.050.180	500
	20,0	12,0 – 15,5				10.700.050.200	500
	25,0	15,0 – 20,5				10.700.050.250	500
	30,0	20,0 – 25,0				10.700.050.300	500
	35,0	24,5 – 30,0				10.700.050.350	250
	40,0	29,0 – 35,0				10.700.050.400	250
	45,0	34,5 – 40,0				10.700.050.450	250
	50,0	39,5 – 45,0				10.700.050.500	250



EN AW - 5754 [AlMg3] 5,1 mm 1650 N 2000 N

Many ALFO® dimensions are available as FER0® version. In this HONSEL/VVG speciality the major part of the mandrel remains in the shank to increase the shear strength.



Diameter 7,8 is not standardized.

Please note our manifold range of assortments and small packs on pages 104/105 and 106-108!

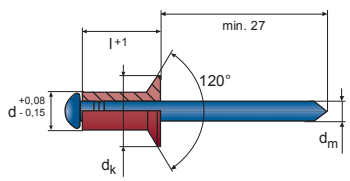

Aluminium / Steel Countersunk Head -open-

DIN EN ISO 15978

d	l ₊₁		d _k	d _m	No.	
3,0	5,0	1,5 – 3,0	6,0 -0,4	1,7	10.700.300.050	500
	6,0	2,0 – 4,0			10.700.300.060	500
	8,0	3,5 – 6,0			10.700.300.080	500
	10,0	5,0 – 7,5			10.700.300.100	500
	12,0	7,0 – 9,0			10.700.300.120	500

EN AW - 5719 [AlMg5] 3,1 mm 660 N 900 N

d	l ₊₁		d _k	d _m	No.	
3,2	6,0	1,5 – 3,5	6,2 -0,4	1,9	10.700.320.060	500
	8,0	3,0 – 5,5			10.700.320.080	500
	10,0	5,0 – 7,5			10.700.320.100	500
	12,0	7,0 – 9,0			10.700.320.120	500

EN AW - 5719 [AlMg5] 3,3 mm 660 N 1100 N

d	l ₊₁		d _k	k	d _m	No.	
6,0	8,0	1,0 – 3,5	12,0 -1,2	1,5 ±0,4	3,2	10.700.060.080	500
	10,0	3,0 – 5,5				10.700.060.100	500
	12,0	5,0 – 7,5				10.700.060.120	500
	16,0	7,0 – 11,0				10.700.060.160	500
	18,0	10,5 – 13,0				10.700.060.180	500
	20,0	11,0 – 15,0				10.700.060.200	500
	22,0	14,5 – 17,0				10.700.060.220	500
	25,0	15,0 – 20,0				10.700.060.250	250
	28,0	19,5 – 22,5				10.700.060.280	250
	30,0	20,0 – 25,0				10.700.060.300	250

EN AW - 5754 [AlMg3] 6,1 mm 2520 N 2850 N

d	l ₊₁		d _k	k	d _m	No.	
6,4	12,0	2,5 – 7,0	13,0 -1,4	1,8 ±0,4	3,6	10.700.064.120	250
	16,0	6,0 – 11,0				10.700.064.160	250
	18,0	10,0 – 13,0				10.700.064.180	250
	20,0	10,0 – 14,5				10.700.064.200	250
	25,0	14,0 – 19,0				10.700.064.250	250
	30,0	18,0 – 24,0				10.700.064.300	250

EN AW - 5754 [AlMg3] 6,5 mm 2850 N 4250 N

d	l ₊₁		d _k	k	d _m	No.	
7,8	15,0	4,0 – 9,5	14,0	2,0	3,7	10.700.078.150	250
	18,0	9,5 – 12,5				10.700.078.180	250
	22,0	12,5 – 16,5				10.700.078.220	250
	26,0	16,5 – 20,5				10.700.078.260	250
	30,0	20,5 – 24,5				10.700.078.300	250
	35,0	24,5 – 29,5				10.700.078.350	250

EN AW - 5754 [AlMg3] 8,0 mm 6600 N 9550 N

d	l ₊₁		d _k	d _m	No.	
4,0	6,0	1,5 – 3,5	7,5 -0,5	2,0	10.700.400.060	500
	8,0	2,0 – 5,5			10.700.400.080	500
	10,0	5,0 – 7,0			10.700.400.100	500
	12,0	6,5 – 9,0			10.700.400.120	500
	16,0	8,5 – 12,5			10.700.400.160	500
	18,0	12,0 – 14,5			10.700.400.180	500

EN AW - 5754 [AlMg3] 4,1 mm 1120 N 1420 N

Further dimensions on the following page!



1 1

Standard Blind Rivet ALFO®

ALFO®



d	l ₊₁		d _k	d _m	No.	
4,8	10,0	4,0 – 6,5	9,0 -0,5	2,7	10.700.480.100	500
	12,0	6,0 – 8,0			10.700.480.120	500
	14,0	7,5 – 10,0			10.700.480.140	500
	16,0	8,0 – 12,0			10.700.480.160	500
	20,0	12,0 – 15,5			10.700.480.200	500

EN AW - 5754 [AlMg3] 4,9 mm 1480 N 1950 N

d	l ₊₁		d _k	d _m	No.	
5,0	8,0	2,0 – 5,0	9,3 -0,5	2,7	10.700.500.080	500
	10,0	4,0 – 6,5			10.700.500.100	500
	12,0	6,0 – 8,0			10.700.500.120	500
	14,0	7,5 – 10,0			10.700.500.140	500
	16,0	8,0 – 12,0			10.700.500.160	500
	18,0	11,5 – 13,5			10.700.500.180	500
	20,0	12,0 – 15,5			10.700.500.200	500
	25,0	15,0 – 20,5			10.700.500.250	500
	30,0	20,0 – 25,5			10.700.500.300	500

EN AW - 5754 [AlMg3] 5,1 mm 1650 N 2000 N

Aluminium / Steel Large Dome Head - open-



d	l ₊₁		d _k	k	d _m	No.	
3,2	6,0	1,5 – 3,5	9,5 ±0,3	1,2 +0,5	1,9	10.730.032.060	500
	8,0	3,0 – 5,5				10.730.032.080	500
	10,0	5,0 – 7,5				10.730.032.100	500
	12,0	7,0 – 9,0				10.730.032.120	500

EN AW - 5754 [AlMg3] 3,3 mm 580 N 850 N

d	l ₊₁		d _k	k	d _m	No.	
4,0	6,0	1,0 – 3,5	12,0 ±0,3	1,5 ±0,5	2,0	10.750.040.060	500
	8,0	3,0 – 5,5				10.750.040.080	500
	10,0	5,0 – 7,0				10.750.040.100	500
	12,0	6,5 – 9,0				10.750.040.120	500
	16,0	8,5 – 12,5				10.750.040.160	500
	18,0	12,0 – 14,5				10.750.040.180	500

EN AW - 5754 [AlMg3] 4,1 mm 1120 N 1900 N

d	l ₊₁		d _k	k	d _m	No.	
4,8	8,0	2,0 – 5,0	16,0 ±0,3	1,8 ±0,5	2,7	10.770.048.080	500
	10,0	4,0 – 6,5				10.770.048.100	500
	12,0	6,0 – 8,0				10.770.048.120	500
	16,0	7,5 – 12,0				10.770.048.160	500
	18,0	11,5 – 13,5				10.770.048.180	500
	20,0	12,0 – 15,5				10.770.048.200	250

EN AW - 5754 [AlMg3] 4,9 mm 1480 N 2200 N

d	l ₊₁		d _k	k	d _m	No.	
5,0	8,0	2,0 – 5,0	11,0 ±0,3	1,5 +0,5	2,7	10.740.050.080	500
	10,0	4,0 – 6,5				10.740.050.100	500
	12,0	6,0 – 8,0				10.740.050.120	500
	14,0	7,5 – 10,0				10.740.050.140	500
	16,0	8,0 – 12,0				10.740.050.160	500
	18,0	11,5 – 13,5				10.740.050.180	500
	20,0	12,0 – 15,5				10.740.050.200	500
	25,0	15,0 – 20,5				10.740.050.250	500
	30,0	20,0 – 25,0				10.740.050.300	500

EN AW - 5754 [AlMg3] 5,1 mm 1650 N 2500 N

d	l ₊₁		d _k	k	d _m	No.	
5,0	8,0	2,0 – 5,0	14,0 ±0,3	1,5 +0,5	2,7	10.760.050.080	500
	10,0	4,0 – 6,5				10.760.050.100	500
	12,0	6,0 – 8,0				10.760.050.120	500
	14,0	7,5 – 10,0				10.760.050.140	500
	16,0	8,0 – 12,0				10.760.050.160	500
	18,0	11,5 – 13,5				10.760.050.180	500
	20,0	12,0 – 15,5				10.760.050.200	500
	25,0	15,0 – 20,5				10.760.050.250	250
	30,0	20,0 – 25,0				10.760.050.300	250

EN AW - 5754 [AlMg3] 5,1 mm 1650 N 2500 N

d	l ₊₁		d _k	k	d _m	No.	
5,0	10,0	2,0 – 6,5	16,0 ±0,3	1,8 +0,5	2,7	10.770.050.100	500
	16,0	6,0 – 12,0				10.770.050.160	500
	20,0	11,5 – 15,5				10.770.050.200	250
	25,0	15,0 – 20,5				10.770.050.250	250
	33,0	20,0 – 28,0				10.770.050.330	250

EN AW - 5754 [AlMg3] 5,1 mm 1650 N 2500 N