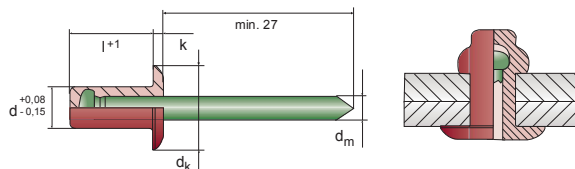


**1****5**

Sealed Blind Rivet CERTO®

CERTO®

Aluminium / Stainless steel Dome Head -closed-

**according to DIN EN ISO 15973**

d	l+1		d _k	k	d _m	No.	
3,2	6,5	0,5 – 2,0	6,0 ± 0,3	1,1 ± 0,15	1,7	10.902.032.065	500
	8,0	1,5 – 3,5				10.902.032.080	500
	9,5	3,0 – 5,0				10.902.032.095	500
	11,0	4,5 – 6,5				10.902.032.110	500
	12,5	6,0 – 8,0				10.902.032.125	500

EN AW - 5019 [AlMg5] 3,3 mm 1000 N 1350 N

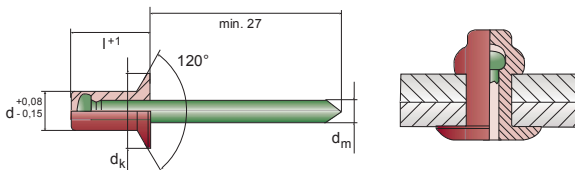
d	l+1		d _k	k	d _m	No.	
4,0	8,0	0,5 – 3,5	8,0 ± 0,4	1,3 ± 0,2	2,2	10.902.040.080	500
	9,5	3,0 – 5,0				10.902.040.095	500
	11,0	4,5 – 6,5				10.902.040.110	500
	12,5	6,0 – 8,0				10.902.040.125	500

EN AW - 5019 [AlMg5] 4,1 mm 1650 N 2500 N

d	l+1		d _k	k	d _m	No.	
4,8	8,0	1,0 – 3,5	9,5 ± 0,4	1,5 ± 0,2	2,7	10.902.048.080	500
	9,5	3,0 – 5,0				10.902.048.095	500
	11,0	4,5 – 6,5				10.902.048.110	500
	12,5	6,0 – 8,0				10.902.048.125	500
	14,0	7,5 – 9,5				10.902.048.140	500
	16,0	9,0 – 11,0				10.902.048.160	500
	18,0	10,5 – 13,0				10.902.048.180	500
	21,0	12,5 – 16,0				10.902.048.210	500

EN AW - 5019 [AlMg5] 4,9 mm 00 N 3400 N

Aluminium / Stainless Steel Countersunk Head -closed-

**according to DIN EN ISO 15974**

d	l+1		d _k	d _m	No.	
4,0	9,5	1,5 – 5,0	8,0 ± 0,3	2,2	10.902.400.095	500
	11,0	4,0 – 6,5			10.902.400.110	500

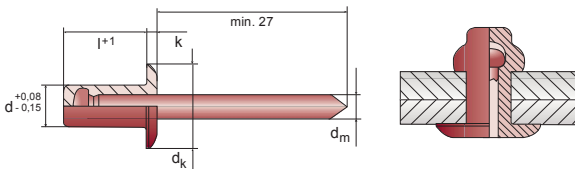
d	l+1		d _k	d _m	No.	
4,0	12,5	6,0 – 8,0	8,0 ± 0,3	2,2	10.902.400.125	500

EN AW - 5019 [AlMg5] 4,1 mm 1650 N 2500 N

**1****5**

Sealed Blind Rivet CERTO®

Aluminium / Aluminium Dome Head -closed-

**DIN EN ISO 15975**

d	l+1		d _k	k	d _m	No.	
3,2	8,0	0,5 – 3,5	6,0 ± 0,3	1,1 ± 0,15	1,9	10.901.032.080	500
	9,5	3,0 – 5,0				10.901.032.095	500

EN AW - 1050 A [Al 99,5] 3,3 mm 520 N 540 N

d	l+1		d _k	k	d _m	No.	
4,0	9,5	0,5 – 5,0	8,0 ± 0,4	1,3 ± 0,2	2,2	10.901.040.095	500
	12,5	4,5 – 8,0				10.901.040.125	500

EN AW - 1050 A [Al 99,5] 4,1 mm 720 N 760 N

d	l+1		d _k	k	d _m	No.	
4,8	9,5	1,0 – 4,5	9,5 ± 0,4	1,5 ± 0,2	2,7	10.901.048.095	500
	11,5	4,0 – 6,5				10.901.048.115	500
	14,5	6,0 – 9,5				10.901.048.145	500
	18,0	9,0 – 13,0				10.901.048.180	500

EN AW - 1050 A [Al 99,5] 4,9 mm 1000 N 1400 N