



Grounding Blind Rivet

Grounding rivets offer a simple and reliable opportunity to create a ground connection with your products. The grounding conductor can be used with standard cable sockets. The processing of grounding blind rivets can be done with all kinds of standard type blind rivet tools.



Grounding Blind Rivet

Grounding Blind Rivet

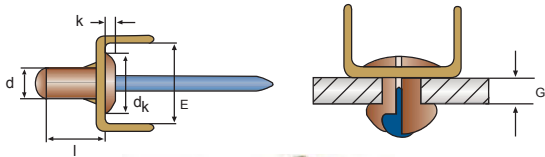

Copper / Steel (copper plated)
**Dome Head - open-
Earthing Conductor Brass (2x)**




d	l	$\begin{matrix} \downarrow \\ \uparrow \end{matrix}$	dk	k	E	No.
3,8	8,0	max. 1,2	8,0	1,4	14,0	10.705.038.080/2

\approx 3,9 mm \rightarrow 1400 N \rightarrow 2000 N

Grounding Blind Rivet




Brass / Steel (copper plated)
1x Earthing Conductor

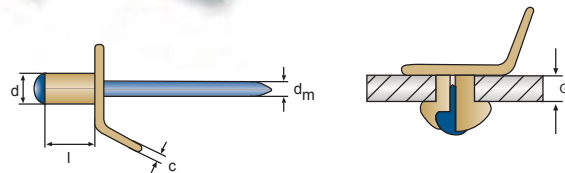

d	l	$\begin{matrix} \downarrow \\ \uparrow \end{matrix}$	dm	c	No.	
4,0	7,0	max. 4,0	2,4	0,8	10.705.040.070/715	500

\approx 4,1 mm


Brass / Steel (copper plated)
2x Earthing Conductor

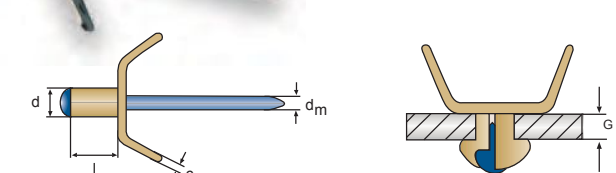

d	l	$\begin{matrix} \downarrow \\ \uparrow \end{matrix}$	dm	c	No.	
4,0	7,0	max. 4,0	2,4	0,8	10.705.040.070/716	500

\approx 4,1 mm

Grounding Multiarip Blind Rivet OPTO®

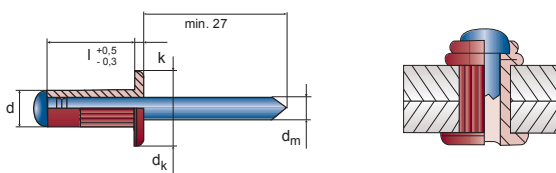

Aluminium / Steel
**Dome Head - open
-grooved shank**

d	l	$\begin{matrix} \downarrow \\ \uparrow \end{matrix}$	dk	k	dm	No.	
4,0	9,5	1,2 - 6,4	7,9	1,2	2,3	10.600.040.095/2	500

EN AW - 5052 [AlMg2,5] \approx 4,1 mm \rightarrow 1140 N \rightarrow 1670 N

Qualified for grounding by grooved shaft.

