


**2****1**

# Blind Rivet Nut AFM

## Aluminium Flat Head Round Shank -open- AFM

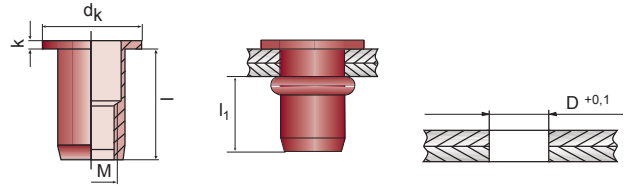

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M3</b>	0,3 – 1,0	5,0	7,0	7,5	0,8	6,0	10.850.030.100	500
	0,3 – 2,0			8,5			10.850.030.200	

EN AW - 5754 [AlMg3] 1 Nm 1500 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M4</b>	0,5 – 3,0	6,0	10,0	11,0	0,8	8,0	10.850.040.300	500
	1,5 – 4,0			12,0			10.850.040.400	

EN AW - 5754 [AlMg3] 3 Nm 2600 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M5</b>	0,5 – 3,0	7,0	11,0	12,0	1,0	9,0	10.850.050.300	500
	3,0 – 4,0			13,0			10.850.050.400	

EN AW - 5754 [AlMg3] 4 Nm 4300 N

► For larger grip ranges take a look at the patented OPTO® multigrip blind rivet nut on the following pages 68/69.

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M6</b>	0,5 – 3,0	9,0	13,0	14,5	1,5	11,0	10.850.060.300	500
	3,0 – 4,5			16,0			10.850.060.450	

EN AW - 5754 [AlMg3] 6 Nm 6700 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M8</b>	0,5 – 3,0	11,0	16,0	17,0	1,5	13,5	10.850.080.300	500
	3,0 – 5,5			19,5			10.850.080.550	
	5,5 – 7,5			21,5			10.850.080.750	

EN AW - 5754 [AlMg3] 18 Nm 11000 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M10</b>	1,0 – 3,0	13,0	19,0	20,5	2,0	16,5	10.850.100.300	250
	3,0 – 4,5			22,0			10.850.100.450	

EN AW - 5754 [AlMg3] 28 Nm 17500 N


M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M12</b>	1,0 – 4,0	16,0	23,0	24,0	2,0	18,5	10.850.120.400	250
	3,5 – 7,0			27,0			10.850.120.700	

EN AW - 5754 [AlMg3] 45 Nm 28000 N

► Please note our manifold range of assortments and small packs on pages 104/105 and 106-108!



## Aluminium Flat Head Round Shank -closed- AFM-G

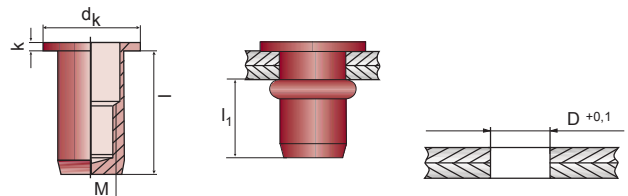

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M4</b>	0,3 – 2,0	6,0	10,0	15,5	0,8	13,5	10.854.040.200	500
	2,0 – 3,0			16,5			10.854.040.300	

EN AW - 5754 [AlMg3] 3 Nm 2600 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M5</b>	0,3 – 3,0	7,0	11,0	18,5	1,0	15,5	10.854.050.300	500
	3,0 – 4,0			19,5			10.854.050.400	

EN AW - 5754 [AlMg3] 4 Nm 4300 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M6</b>	0,5 – 3,0	9,0	13,0	22,0	1,5	18,5	10.854.060.300	500
	3,0 – 4,5			23,5			10.854.060.450	

EN AW - 5754 [AlMg3] 6 Nm 6700 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M8</b>	0,3 – 3,0	11,0	16,0	26,5	1,5	23,0	10.854.080.300	250
	3,0 – 5,5			29,0			10.854.080.550	

EN AW - 5754 [AlMg3] 18 Nm 11000 N

M	$\frac{+}{-}$	D	dk	l	k	l <sub>1</sub> max.	No.	
<b>M10</b>	1,0 – 3,0	13,0	19,0	32,5	2,0	28,5	10.854.100.300	250
	3,0 – 4,5			34,0			10.854.100.450	

EN AW - 5754 [AlMg3] 28 Nm 17500 N

► Additional possibilities for sealing on ► page 112