

**i** SFM-PL folding blind rivet nuts are constructed for those applications where a **high pull-out strength** is requested.

The slotted shaft makes the rivet nut split into four straps with a wide contact surface that guarantee an **equal distribution of forces** especially on plastics and other vulnerable materials.

Furthermore this type offers a very **big grip range!**


SFM-PL split blind rivet nuts are for example used in all fields of vehicle manufacturing.

SFM-PL

2 3



## Folding Blind Rivet Nut SFM-PL

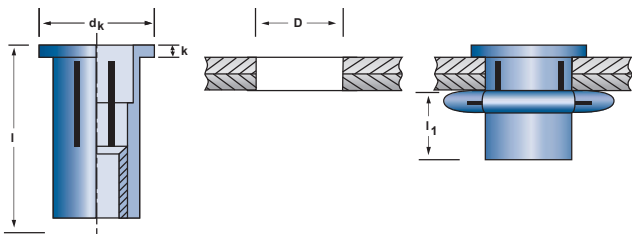

**Steel**  
**Flat Head**  
**Round Shank -open-**  
**SFM-PL**

M		D		dk	l	k	l <sub>1</sub> max.	No.	
<b>M6</b>	0,5 – 7,1	9,8 -0,45	10,0-10,15	16,4 -0,1	25,8 -0,8	1,6 -0,25	11,7	10.816.060.710	500
				↻ 12 Nm		↓ 15000 N			
<b>M8</b>	0,5 – 7,1	12,6 -0,1	12,7-12,85	19,6 -0,8	29,6 -1,0	1,7 -0,25	13,6	10.816.080.710	500
				↻ 21 Nm		↓ 27000 N			



**NEW!**  
For handling SFM-PL blind rivet nuts a big stroke is necessary.

HONSEL/VVG offer the special pneumatic-hydraulic tool **VNG 753** for this application.

For details as please ask our sales team and take look on **▶ pages 130/131!**

